



Item		Specification
Model Name		N-063S
Type	Installation	Indoor or Outdoor, Wall Hanging
	Air-supply/Exhaust	Power Vented
Ignition		Direct Ignition
Operating Water Pressure		15 - 150 PSI
Minimum Flow Rate		0.5 GPM
Gas Supply Pressure		NG : 4.0" - 10.5" LP : 8.0" - 14.0"
Dimensions		23.6"(Height) x 13.8"(Width) x 9.4"(Depth)
Weight		44 (pounds)
Water Holding Capacity		0.2 Gallon
Connection Sizes	Water Inlet	3/4"
	Hot Water Outlet	3/4"
	Gas Inlet	3/4"
Power	Supply	120VAC(60Hz)
	Consumption	NG: 65W LP: 65W Freeze Prevention 125W
Material	Casing	Zincified Steel Plate / Acryl Coating
	Flue Collar	Stainless Steel
	Heat Exchanger	Copper Sheetting, Copper Tubing
Safety Devices		Flame Rod, Thermal Fuse, Pressure Relief Valve, Lightning Protection Device (ZNR), Electric Leakage Prevention Device(GFCI), Overheat Prevention Device, Freezing Prevention Device, Fan Rotation Detector
Accessories		Anchoring Screws

Model N-063S Product Performance



[Winter] Water temperature: 46°F

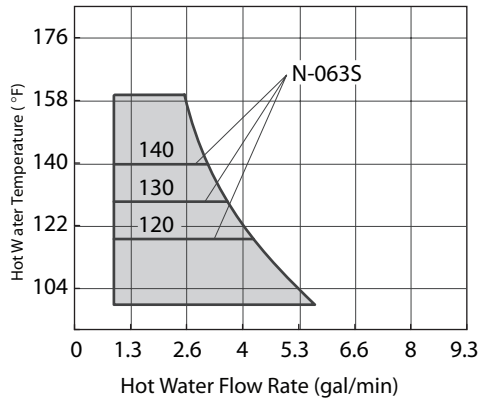

[Spring/Fall] Water temperature: 64°F

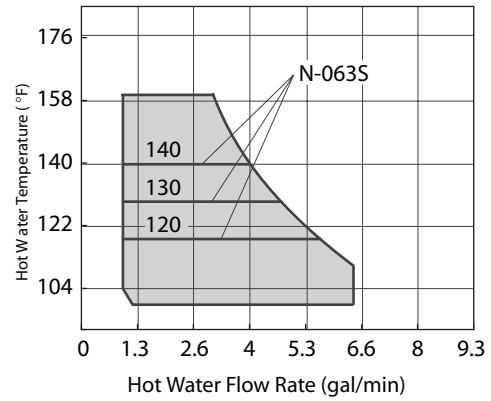

[Summer] Water temperature: 82°F

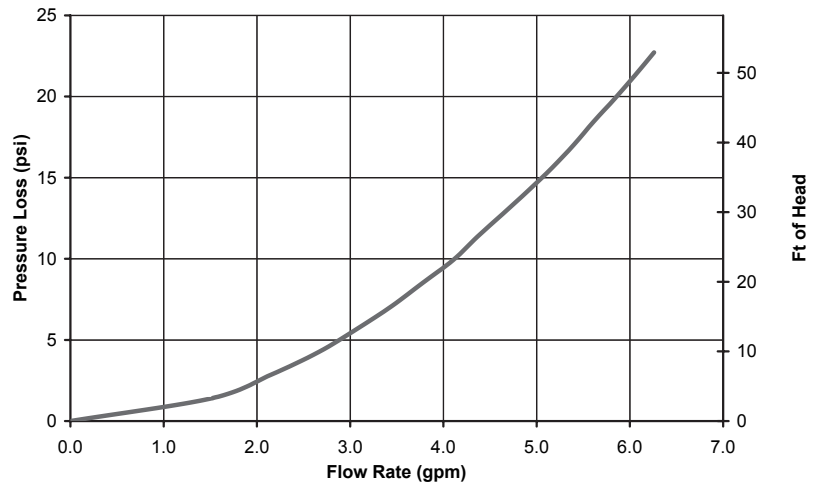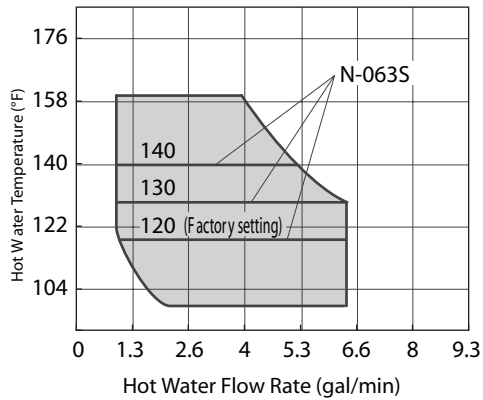

Item		Maximum Performance	Minimum Performance
Gas	NG	194,000 btuh	25,000 btuh
Consumption	LP	194,000 btuh	25,000 btuh
Hot Water Capacity	45°F Rise	6.3 Gal/min.	
	77°F Rise	4.0 Gal/min.	
	100°F Rise	3.1 Gal/min.	
Capacity Range	0.5 - 6.3 Gal/min.		
Temperature Settings (W/ Controller)		100-150°F (In 5°F intervals), 160°F (12 Options)	
Default Temperature Options		120, 130, 140°F (Original is 120°F)	

Architect/Engineer _____

Customer/Job Name _____

Address _____

Contractor _____

Date _____ Phone _____